



COVERSTRIPS

MJ11 - Rippled

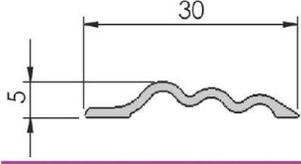


Recommended for use domestically on floors with height variations of up to 3mm.

MJ12 - Senior

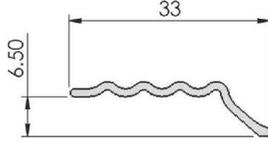


Recommended for use domestically on floors with height variations of up to 6mm.

MJ13 - Hammered

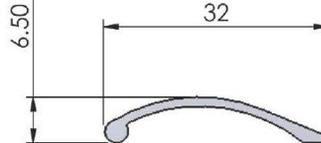

Recommended for use domestically on floors with height variations of up to 3mm.

MJ14 - Commercial

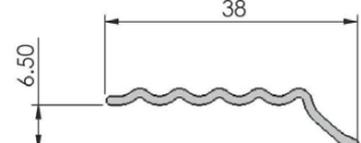


Recommended for use commercially on floors with height variations of up to 6mm.

Product specifications

| Product code: | MJ11 | MJ12 | MJ13 | MJ14 |
|---------------------------|-------------------------|-------|-------|-------|
| Overall length: | 3.3m | 3.3m | 3.3m | 3.66m |
| Horizontal width: | 30mm | 33mm | 32mm | 38mm |
| Anodised finishes: | | | | |
| | Black (BL) | | ✓ | |
| | Bronze (BR) | ✓ | ✓ | |
| | Champagne (CH) | ✓ | ✓ | |
| | Pewter (PE) | ✓ | ✓ | |
| | Silver (SI) | ✓ | ✓ | |
| | Mill (M) - Not anodised | ✓ | ✓ | ✓ |
| Countersunk hole centres: | 210mm | 210mm | 210mm | 220mm |
| Lengths per carton: | 10 | 10 | 10 | 10 |

Notation: Matching nails sold separately

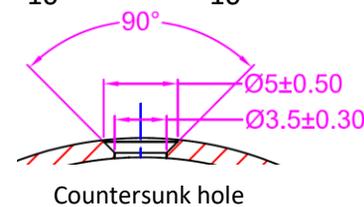

Installation instructions

Cut the coverstrip to your required length. For wooden sub-floors coverstrips are recommended to be secured with rippletrim nails (nails sold separately). On concrete sub-floors, it is recommended to use concrete nails (nails sold separately). Hammer nail down until the trim is held firmly without defacing the surface.

Safety statement: When cutting or drilling aluminium we recommend the use of safety glasses and gloves.

