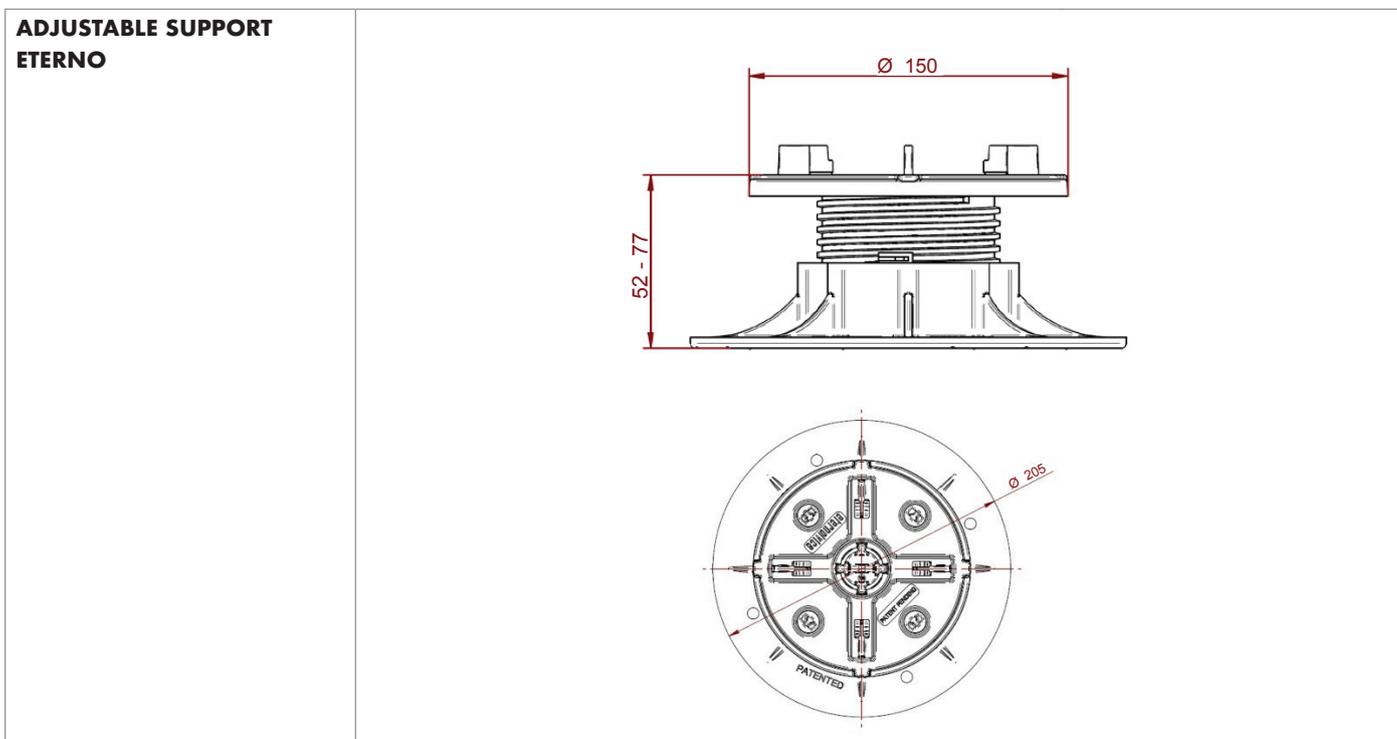


# SE W 2



CODE: E44005207*	REV 01	19/11/2018	
------------------	--------	------------	--



<b>ITEM SPECIFICATION</b>	<p>"Eterno Windproof" support for raised floors, adjustable in height and provided with a bi-component head with anti noise and non slip rubber finishes.</p> <p>The supports feature a polypropylene base with a minimum diameter of 205 mm, a screw with a security lock system and an adjustable height that ranges from 52 mm to 77 mm, and a top head element with four 14 mm high and 4 mm thick pre-cut spacer tabs for easy removal.</p> <p>The base element features water drainage holes and 4 pre-cut lines to facilitate any cutting if required.</p> <p>Adjustment in height is made with the exclusive regulation key which acts on the screw independently from both the head and the base.</p>
---------------------------	--

<b>PRODUCT RANGE</b>	<b>PEDESTAL</b>
PRODUCT NAME	SE 2
TECHNICAL CHARACTERISTICS	Adjustable in height. Bicomponent material head (PP and rubber) Regulation key for height adjustment Easy removable tabs Security lock system to prevent unlocking
RAW MATERIAL	Polypropylene and rubber (head top finishing)
ENVIRONMENTAL IMPACT	Recyclable material – non dangerous
APPLICATIONS SURFACE	On any waterproofing membrane, insulating panel or any compact and solid surface
APPLICATIONS AREA	Usable with any prefabricated self sustaining element for exterior flooring with minimum 15 mm thickness

CHARACTERISTICS	UNIT	VALUE	TOLERANCE
BASE DIAMETER	mm	205	+/- mm 1,0
BASE THICKNESS	mm	5	+/- mm 0,2
HEAD DIAMETER	mm	150	+/- mm 0,8
LAYING SURFACE OF THE BASE	cmq	330	+/- mm 0,2
MINIMUM HEIGHT	mm	52	+/- mm 1,0
MAXIMUM HEIGHT	mm	77	+/- mm 1,5
SPACER TABS THICKNESS	mm	4	+/- mm 0,2
SPACER TABS THICKNESS	mm	14	+/- mm 0,2
WEIGHT	kg	0.43	+/- 5 %

TECHNICAL PROPERTIES		UNIT	VALUE
CENTRAL COMPRESSION LOADING LIMIT RESISTANCE* (calculated at medium height, between minimum and maximum extension)		KN	16.5
ECCENTRIC COMPRESSION LOADING LIMIT RESISTANCE* (calculated at medium height, between minimum and maximum extension)		KN	14
RESISTANCE TO WIND DEPRESSION (calculated simulating a laying floor)		Pa	700
HARDNESS		Shore D	70 (+/-3)
COMPENSATION SLOPE *Tests made by Civil. Construction and Environmental Department of University of Padova. 1 KN = 98,6 Kg **Tests made by Giordano S.p.A. Institute of Bellaria-Igea Marina (RN)-Italy 1Pa ≈ 1kg/m2		%	0-5

PHYSICAL AND CHEMICAL PROPERTIES	METHOD	UNIT	VALUE
REACTION TO FIRE*	UNI EN 13501-1:2009	CLASS	E
RESISTANCE TO LOW TEMPERATURE *Tests made by Giordano S.p.A. Institute of Bellaria-Igea Marina (RN)-Italy			-40°

<b>LAYING OF THE PRODUCT</b>	The product is simply laid on the substrate of choice, with no need of any glue or fixing
------------------------------	---

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.