

Stair Nosing Inserts

RECOMMENDED FOR

SureTrim® 50mm Rubber Stair Nosing Inserts are recommended for use with BBS aluminium Stair Nosings to provide a colour contrast and slip resistance. A 25mm version works with BBS #950 and #930 control joints.

PERFORMANCE CHARACTERISTICS

Burning Behaviour: Meets BCA C1.10:2012 in all building types

Critical Radiant Flux (CRF) of 8kW/m² Mean Smoke Development Rate (MSDR) of 410%-minutes

Slip Resistance: Measured to AS 4586:2013

P3 with the Wet Pendulum Test (Appendix A), R10 with the Oil-Wet Inclining Platform (Appendix D)

Luminance Reflective Values: Measured to AS/NZS 1428.1: 2009

Black - 3.51 Wet, 3.71 Dry

Safety Yellow - 42.12 Wet, 43.57 Dry

Grey - 14.26 Wet, 14.31 Dry

PHYSICAL DATA

#050 Black, Grey, Safety Yellow

#025 Black, Grey, Safety Yellow

50mm Width

25mm Width

37m Roll Lengths


37m Roll Lengths

2 Rolls per Carton


4 Rolls per Carton

INSTALLATION

Install with PT530-40/50 Stair Nosing Insert Tape

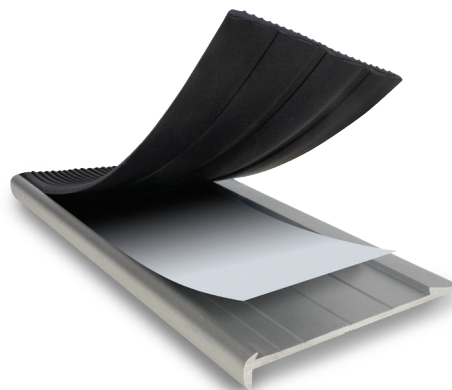

RUBBER INSERTS



Black



Safety Yellow



Grey

		LENGTH	LM/CTN	SLIP RATING	DRY LRV	WET LRV
#050B, 50mm Rubber Insert	●	37	(2) 74	P3/R10	3.71	3.51
#050G, 50mm Rubber Insert	●	37	(2) 74	P3/R10	14.31	14.26
#050SY, 50mm Rubber Insert	●	37	(2) 74	P3/R10	43.57	42.12
#025B, 25mm Rubber Insert	●	37	(2) 74	P3/R10	3.71	3.51
#025G, 25mm Rubber Insert	●	37	(2) 74	P3/R10	14.31	14.26
#025SY, 25mm Rubber Insert	●	37	(2) 74	P3/R10	43.57	42.12