

RECOMMENDED FOR

A smooth transition for people with mobility issues between carpet / carpet tile ramping down to other floor coverings
Suitable for heavy domestic and light commercial applications

AS 1428.1: 2009, DESIGN FOR ACCESS AND MOBILITY

A smooth gradient for wheelchair and other assisted traffic
Compliant with AS 1428.1: 2009, Design for Access and Mobility

AS 4586:2013, SLIP RESISTANCE

Finished with a P3 rated non-slip Pyramid insert in Black, or Grey

BURNING BEHAVIOUR

Compliant with **Mean Critical Radiant Flux** and **Mean Smoke Development Rate** in all building types
Refer to BCA C1.10 2012 for detailed building requirements


INSTALLATION

1. Choose the right trim according to the ramping required between the two floor coverings
2. When installed the curved edge should firmly embed into the carpet pile
3. Install with stainless steel screws and pugs to the subfloor, facing the curved edge into the carpet pile
4. Choose the colour of the non-slip rounded glass bead insert and cut to length
5. Peel away the insert backing and press into the track to cover the stainless steel screw heads


PHYSICAL DATA

Code	Description	Colour	Length (m)	Carton	Mobility AS-1428.1	Slip AS-4586
HT-380	32mm Carpet Ramp (C)	Silver / Black	3.66	10 lengths	Compliant	P3
HT-384	35mm Carpet Ramp (C)	Silver / Black	3.66	10 lengths	Compliant	P3
HT-382	45mm Carpet Ramp (C)	Silver / Black	3.66	10 lengths	Compliant	P3
PT-592-20/10	20mm Pyramid Insert	Black / Grey	10	72 rolls	Compliant	P3


#380, 32mm Carpet Ramp (C)
#592-20/10, Pyramid Insert (P3)
AS 1428 Compliant

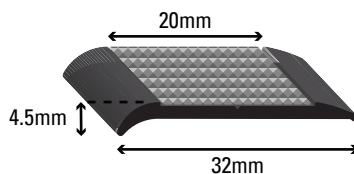


#384, 35mm Carpet Ramp (C)
#592-20/10, Pyramid Insert (P3)
AS 1428 Compliant

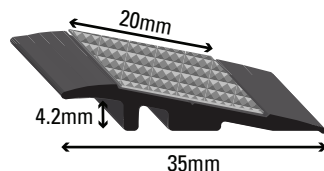

#382, 45mm Carpet Ramp (C)
#592-20/10, Pyramid Insert (P3)
AS 1428 Compliant

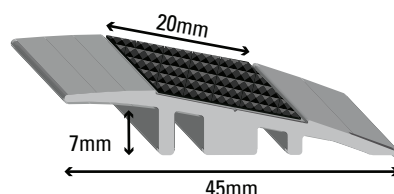

#592-20/10, Pyramid Insert (P3)
AS 1428 Compliant



P3 Slip Rated Inserts

